

Short Communication

Studies on the application of different levels of water on Zero energy cool chamber with reference to the shelf-life of brinjal

M. GANESAN*, K. BALASUBRAMANIAN AND R. V. BHAVANI

¹JRD Tata Ecotechnology Centre, M.S. Swaminathan Research Foundation, 3rd Cross street, Taramani Institutional Area, Chennai 600 113, India.

emails: ganesh@mssrf.res.in, ganchitra@rediffmail.com.

Phone: +91 44 22541229, 22541698, Fax: +91 44 22541319.

Received on March 15, 2004; Revised on August 16, 2004

Abstract

In the present study, fruits of brinjal or eggplant (cv. Pattabiram) were stored in cool chambers at room temperature. Three different levels of water (100, 75 and 50 litres per day) were added through drip irrigation system to moisten the sand in the cool chamber. The physiological loss in weight and rotting percentage increased at room temperature, but decreased with increasing water level up to 100 litres per day. The shelf-life at room temperature which was hardly 3 days enhanced to 9 days with the addition of 100 litres of water per day.

Keywords: Cool chamber, vegetable storage, brinjal or egg plant, shelf-life.

1. Introduction

Brinjal or egg plant (*Solanum melongena*), one of the important vegetable crops belonging to the family solanacea, is grown commercially under arid and semi-arid climatic conditions. The consumer preference greatly varies based on colour, size and shape. Tamil Nadu is a major producing state of brinjal in India. A large quantity of the fresh brinjal gets wasted after the harvest due to inadequate storage facilities. Zero energy cool chamber developed at the Indian Agricultural Research Institute (IARI), New Delhi, India [1], could help store the harvested fruits and vegetables for a reasonable time [2–6]. Water plays a vital role in regulating relative humidity and temperature, which are important factors in the cool chamber. Too moist or too dry cool chamber will lead to unwanted growth of fungus and spoil the stored fruits. Since the moisture content in the cool chamber is regulated by the quantity of water added to the sand, it is necessary to find the optimum quantity of water to be added for effective performance of the cool chamber. Till now no such work has been reported in the literature. In order to standardize the quantity of water to be added per day, the present study was taken up with the objective of retaining the quality and extending the shelf-life of brinjal fruits in the zero energy cool chamber.

*Author for correspondence.

Table I

Effect of water level on shelf-life (days) of brinjal fruits stored in the cool chambers and at room temperature

Treatments	Shelf-life (days)	
	I Experiment	II Experiment
T1–100 l/day	8.80	9.40
T2–75 l/day	7.60	8.20
T3–50 l/day	7.00	7.20
T4–Room temperature	3.20	2.60
CD at 5%	1.10	0.82

2. Materials and methods

The experiment was carried out at the JRD Tata Ecotechnology Center of M.S. Swaminathan Research Foundation, Chennai. Freshly harvested fruits of brinjal (cv. Pattabiram) were obtained from farmer's field located in Thiruthaveli village near Kattupakkam in Kattangulathur block of Kancheepuram district in Tamil Nadu, India, which is 45 km away from the experimental site. The fruits were brought to Chennai within two hours of harvest, and sorted out for elimination of bruised, punctured and damaged ones during transport. Soon after sorting, the vegetables were stored using perforated plastic crates in cool chamber and at room temperature conditions. The experiment was conducted in April 2003 and was repeated in May 2003. The trial was laid out in a complete randomized block design with five replications. The treatments consisted of three levels of water after saturating the bricks and sand with water. These were: T₁, 100 liters per day, T₂, 75 liters per day and T₃, 50 liters per day and T₄, was storage in the open at room temperature. A rectangle shape floor measuring 165 × 115 cm was made with bricks. Over this, a double wall was erected to a height of 67.5 cm leaving a gap of 7.5 cm between the double walls. The walls were drenched with water. Wet fine river sand was filled in the 7.5 cm gap between walls. A bamboo frame (165 × 115 cm) was made to cover the chamber. A thatched shed was constructed over the chamber in order to protect it from direct sun or rain. During the experimental period, the sand between the walls, bricks and top cover of the chamber were kept moist with varied quantities of water as per the treatments through drip system with plastic pipes and micro tubes connected to an overhead water source. The construction of zero energy cool chamber was followed as per ICAR [7]. The stored fruits were evaluated every two days till they rotted completely. Observations on physiological loss in weight (PLW%), rotting (%) and shelf-life were recorded. The PLW was determined by noting the difference between the initial and subsequent weights and was expressed in terms of percentage. The rotting percentage was determined after weighing the infected fruits. The shelf-life of the fruits was determined by judging the unmarketability parameters such as shriveling which was mainly due to physiological loss in weight. Ten per cent loss in weight was considered as an index of end of shelf-life of the vegetable. The data were analyzed statistically [8]. Temperature and relative humidity were also recorded at 2.00 pm every day using dry and wet bulb thermometer.

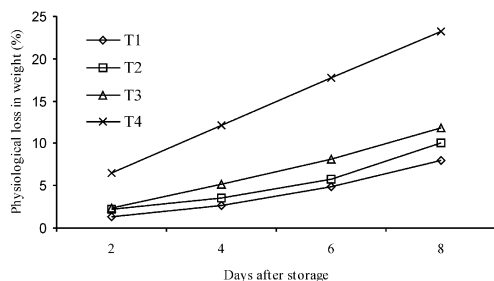


FIG. 1. Effect of water level on physiological loss in weight of brinjal fruits stored in the cool chambers and at room temperature in the first experiment.

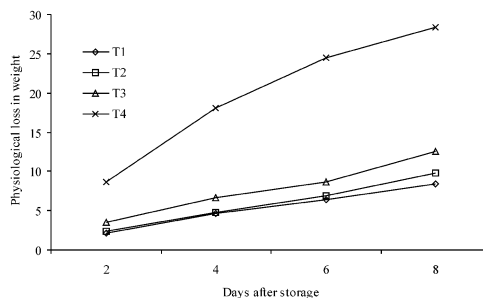


FIG. 2. Effect of water level on physiological loss in weight of brinjal stored in the cool chambers and room temperature in the second experiment.

3. Results and discussion

The analysis of variance for the data on shelf-life (days) (Table I) showed highly significant differences among the treatments. The shelf-life of brinjal increased with increase in the addition of water up to 100 litres of water per day. The fruits were stored better in the cool chambers than at room temperature. At room temperature, the shelf-life was only up to three days, whereas in the cool chamber, it extended up to 9 days with the addition of 100 l/day. Fruits stored in the cool chamber had good acceptance in the market at the end of storage. They were fresh, firm and attractive even at the end of 9 days compared to those stored at room temperature. Several workers [2–6, 9] reported that the cool chamber-stored fruits and vegetables look and taste better than the ones stored at room temperature.

Highly significant differences were recorded in the PLW in both the experiments. There was a sharp increase in the PLW of fruits stored at room temperature (Figs. 1 and 2), whereas it was low in fruits stored in the cool chambers. The 100 l per day treatment followed by 75 and 50 l per day showed low increase in PLW. This might be due to optimum moisture content in the sand, which kept the fairly high relative humidity (RH) and reduced the temperature prevailing inside the cool chambers as compared to room temperature.

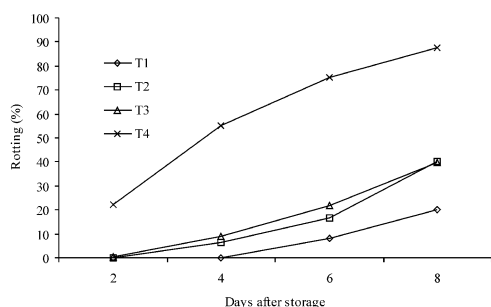


FIG. 3. Effect of water level on rotting (%) of brinjal fruits stored in the cool chambers and at room temperature in the first experiment.

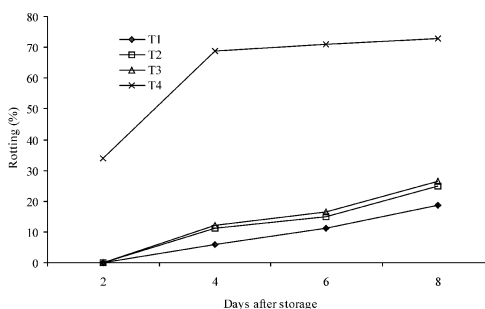


FIG. 4. Effect of water level on rotting (%) of brinjal stored in cool chambers and at room temperature in the second experiment.

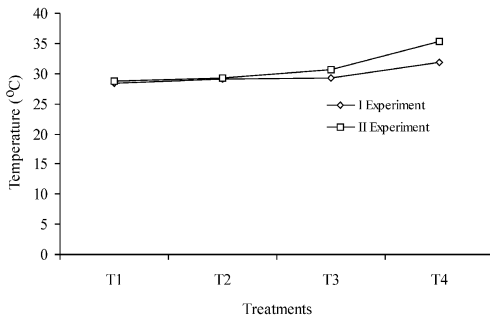


FIG. 5. Average temperature at 2.00 pm in the cool chamber and at room temperature.

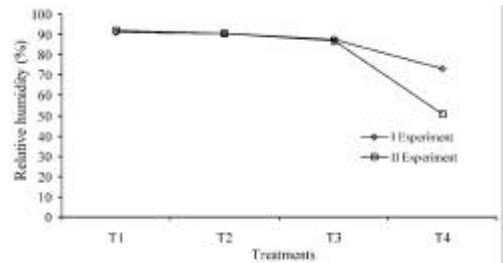


FIG. 6. Average relative humidity (%) in the cool chambers and at room temperature.

The analysis of variance of data for rotting (%) showed highly significant variation among the treatments. The lowest rotting (%) was in the vegetable with the addition of 100 l/day followed by 75 l and 50 l/day in that order (Figs. 3 and 4). No rotting (%) was observed up to 4th day of storage with 100 l/day. At the end of the shelf-life of the fruits, highest rotting was noticed with storage at room temperature.

Data on the average temperature and relative humidity measured by dry and wet bulb at 2.00 pm daily in cool chambers are shown in Figs. 5 and 6. The cool chamber treatments recorded relatively lower temperature than the room temperature. A difference of 2–3°C between cool chambers and room temperature condition was observed during the first experiment, whereas it was 5–6°C in the second experiment. Lower temperature in the cool chamber is due to moisture in the sand caused by evaporative cooling method. Relative humidity was always higher in the cool chamber than in the open at room temperature. Lower temperature and higher relative humidity in cool chambers contributed to improved shelf-life. All the three water-level treatments recorded better results than storage at room temperature. Roy [10] constructed similar commercial size cool chamber at the Indian Agricultural Research Institute, New Delhi, and found lower temperature and higher relative humidity (85–90%) inside the cool chamber.

A 100-kg capacity cool chamber costs about Rs 2500.00 (\$) (Table II) and small farmers can easily construct it near their field and store the vegetable for some days before their dispatch to the market at an opportune time. The farmers thus can avoid distress sale.

Table II

Cost benefit analysis of cool chamber (100 kg capacity)

Brick (400 Nos)	Rs 800.00
Sand	Rs 100.00
Bamboo, paddy straw for top cover	Rs 250.00
Thatched shed	Rs 500.00
Water tank, pipes, tubes etc.	Rs 600.00
Labour	Rs 250.00
Total	Rs 2500.00 (about US \$ 50–55)

This will help the consumer to obtain the vegetable at a relatively stable price over a long period of time.

4. Conclusion

This study shows that the shelf-life of brinjal fruits could be extended up to 9 days in the cool chamber with the addition of 100 litres of water per day. The added advantage of the cool chamber is that it does not require any mechanical or electrical energy and is easily installable with cheap and locally available raw materials.

Acknowledgement

The authors gratefully acknowledge the assistance provided by Volkart and JRD Tata Ecotechnology Centre in conducting the study and Dr SP. Palaniappan for his valuable suggestions and correcting the manuscript.

References

1. S. K. Roy, Post-harvest storage of fruits and vegetables in a specially designed build-in space, *Proc. Int. Workshop on Energy Conservation in Buildings*, Central Building Research Institute, Roorkee (1984).
2. S. K. Roy, and D. S. Khurdiya, Studies on evaporatively cooled zero energy input cool chamber for storage of horticultural produce, *Indian Food Packer*, **40**, 26–31 (1986).
3. R. K. Pal and S. K. Roy, Zero-energy cool chamber for maintaining post harvest quality of carrot (*Daucus carota*), *Indian J. Agric. Sci.*, **58**, 665–667 (1988).
4. S. K. Roy and R. K. Pal, A low cost zero energy cool chamber for short-term storage of mango, *Acta Horti.*, **291**, 519–524 (1991).
5. R. K. Pal, S. K. Roy and S. Sanjay, Storage performance of Kinnow Mandarins in evaporative cool chamber and ambient condition. *J. Food Sci. Technol.*, **34**, 200–203 (1997).
6. P. S. Negi and S. K. Roy, Storage performance of savoy beet (*Beta vulgaris var bengalensis*) different growing seasons, *Trop. Sci.*, **40**, 211–213 (2000).
7. ICAR Newsletter, (1997).
8. G. A. Kwanchai and G. A. Arturo, *Statistical procedures for agricultural research*, 2nd edition, Wiley (1996).
9. D. P. Waskar and S. D. Masalkar, Effect of hydrocooling and bavistin dip on the shelf-life and quality of mango during storage under various conditions, *Acta Horti.*, **455**, 687–695 (1997).
10. S. K. Roy, Storage of tropical and subtropical fruits, Proc. National Seminar on New horizons in production and post-harvest management of tropical and subtropical fruits, *Indian J. Horti.*, **58**, 164–169 (2001).